




Biogas New Systems

China-Italy S&T Innovation Forum 2010

Napoli 11-12 novembre 2010 - Città della Scienza

Sanitation Strategies with Water Consumption

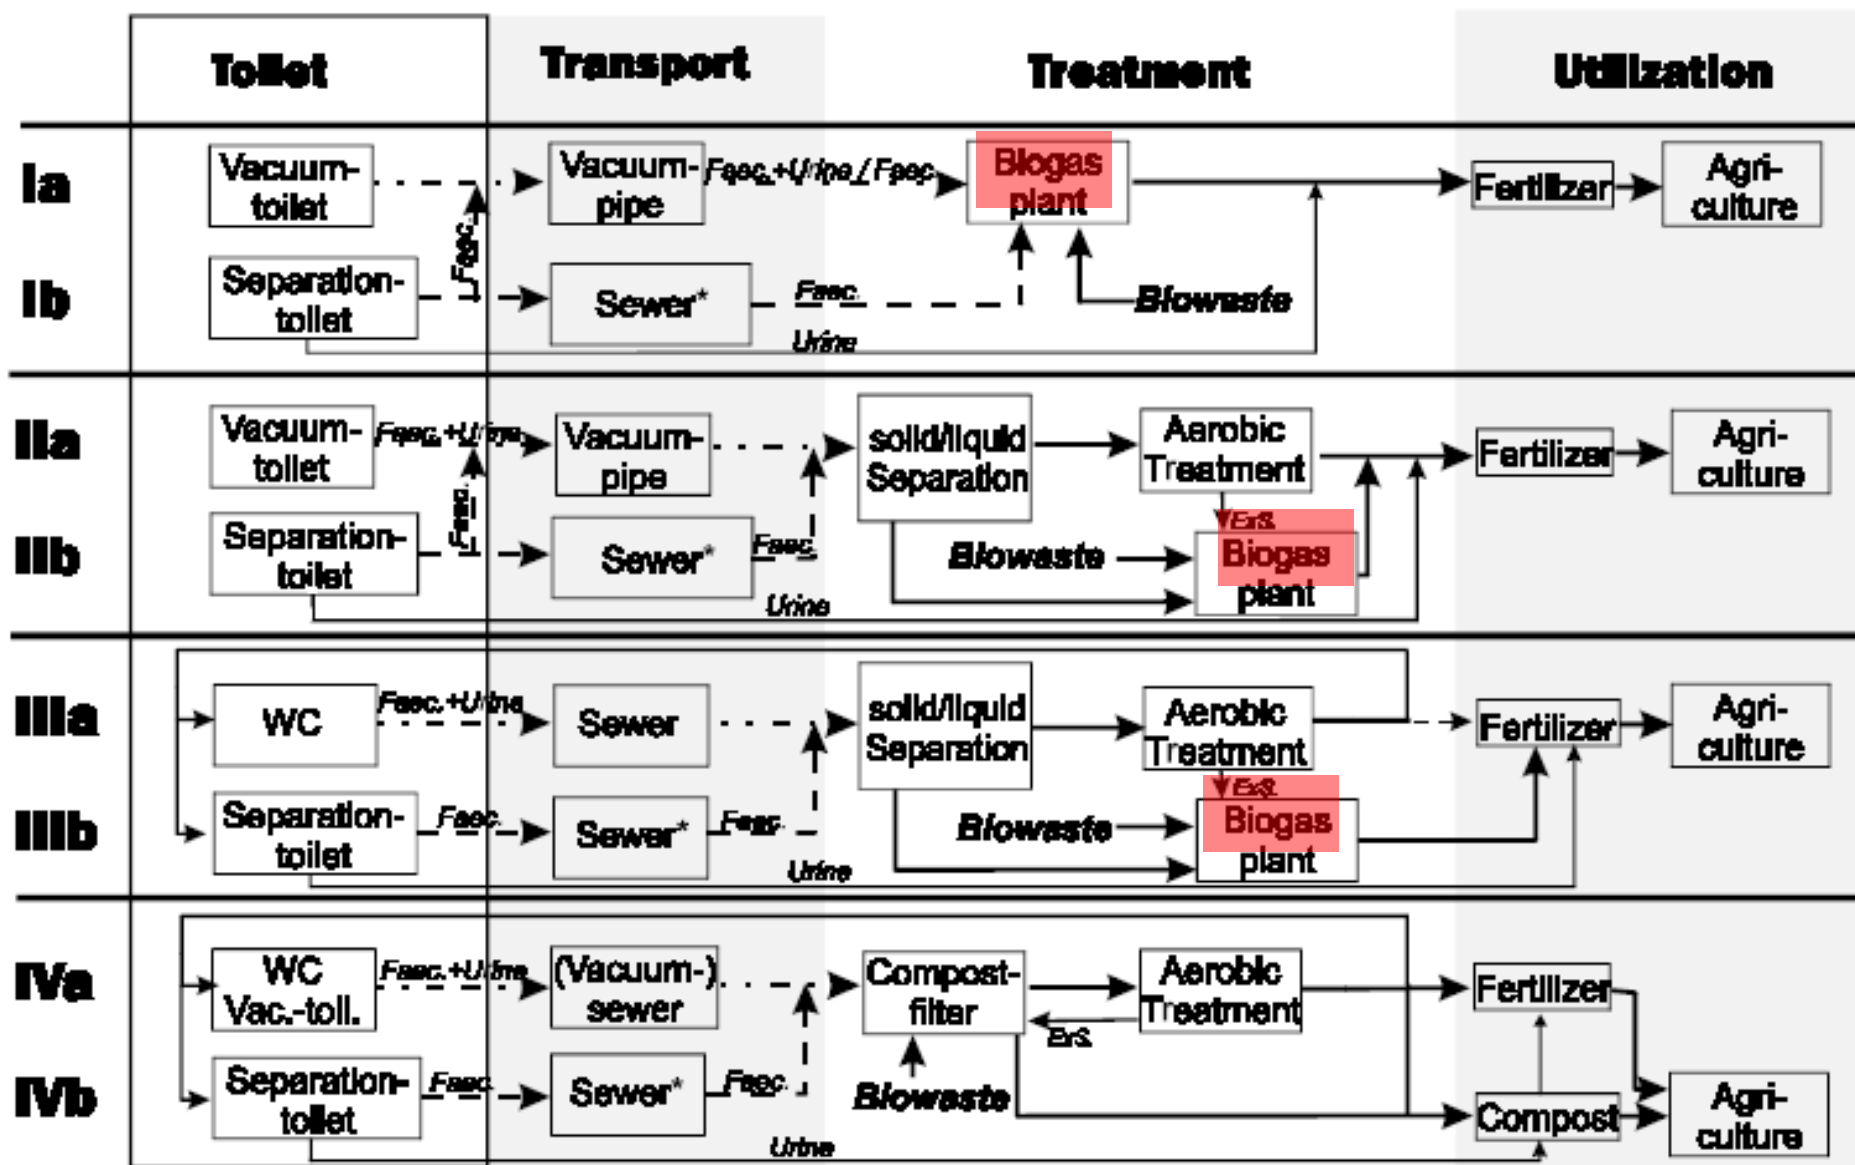

*Sewer: flush sewer, pressure or vacuum sewer

Sanitation Strategies without Water Consumption

Tollet

Transport

Treatment

Utilization

V



VI



VII




Low-Tech-Low-Cost Strategies for warm Climates

VIII




IX

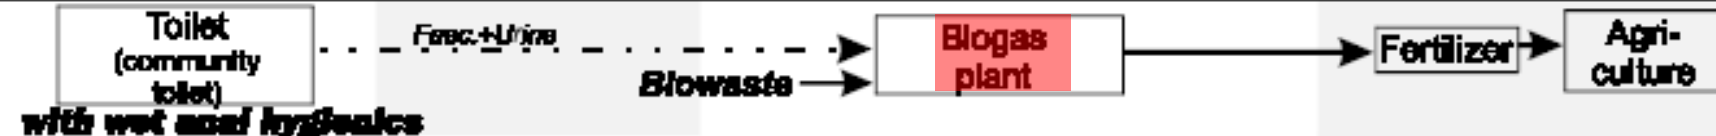


Forest- and Agriculture with whole-year-growing

X

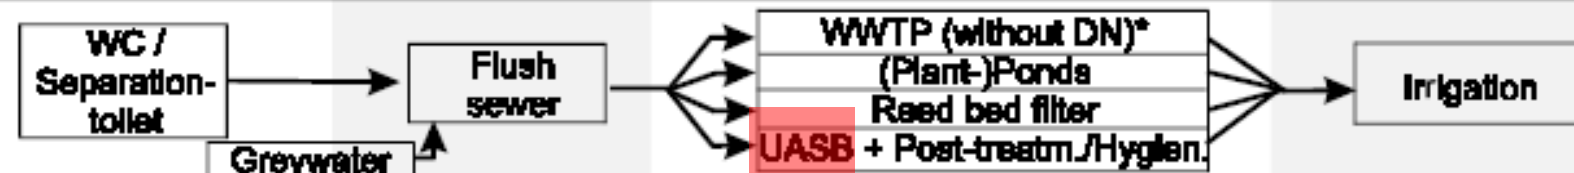


*DN = Denitrification

Basic ideas of Ecological Home and Prosperity Program

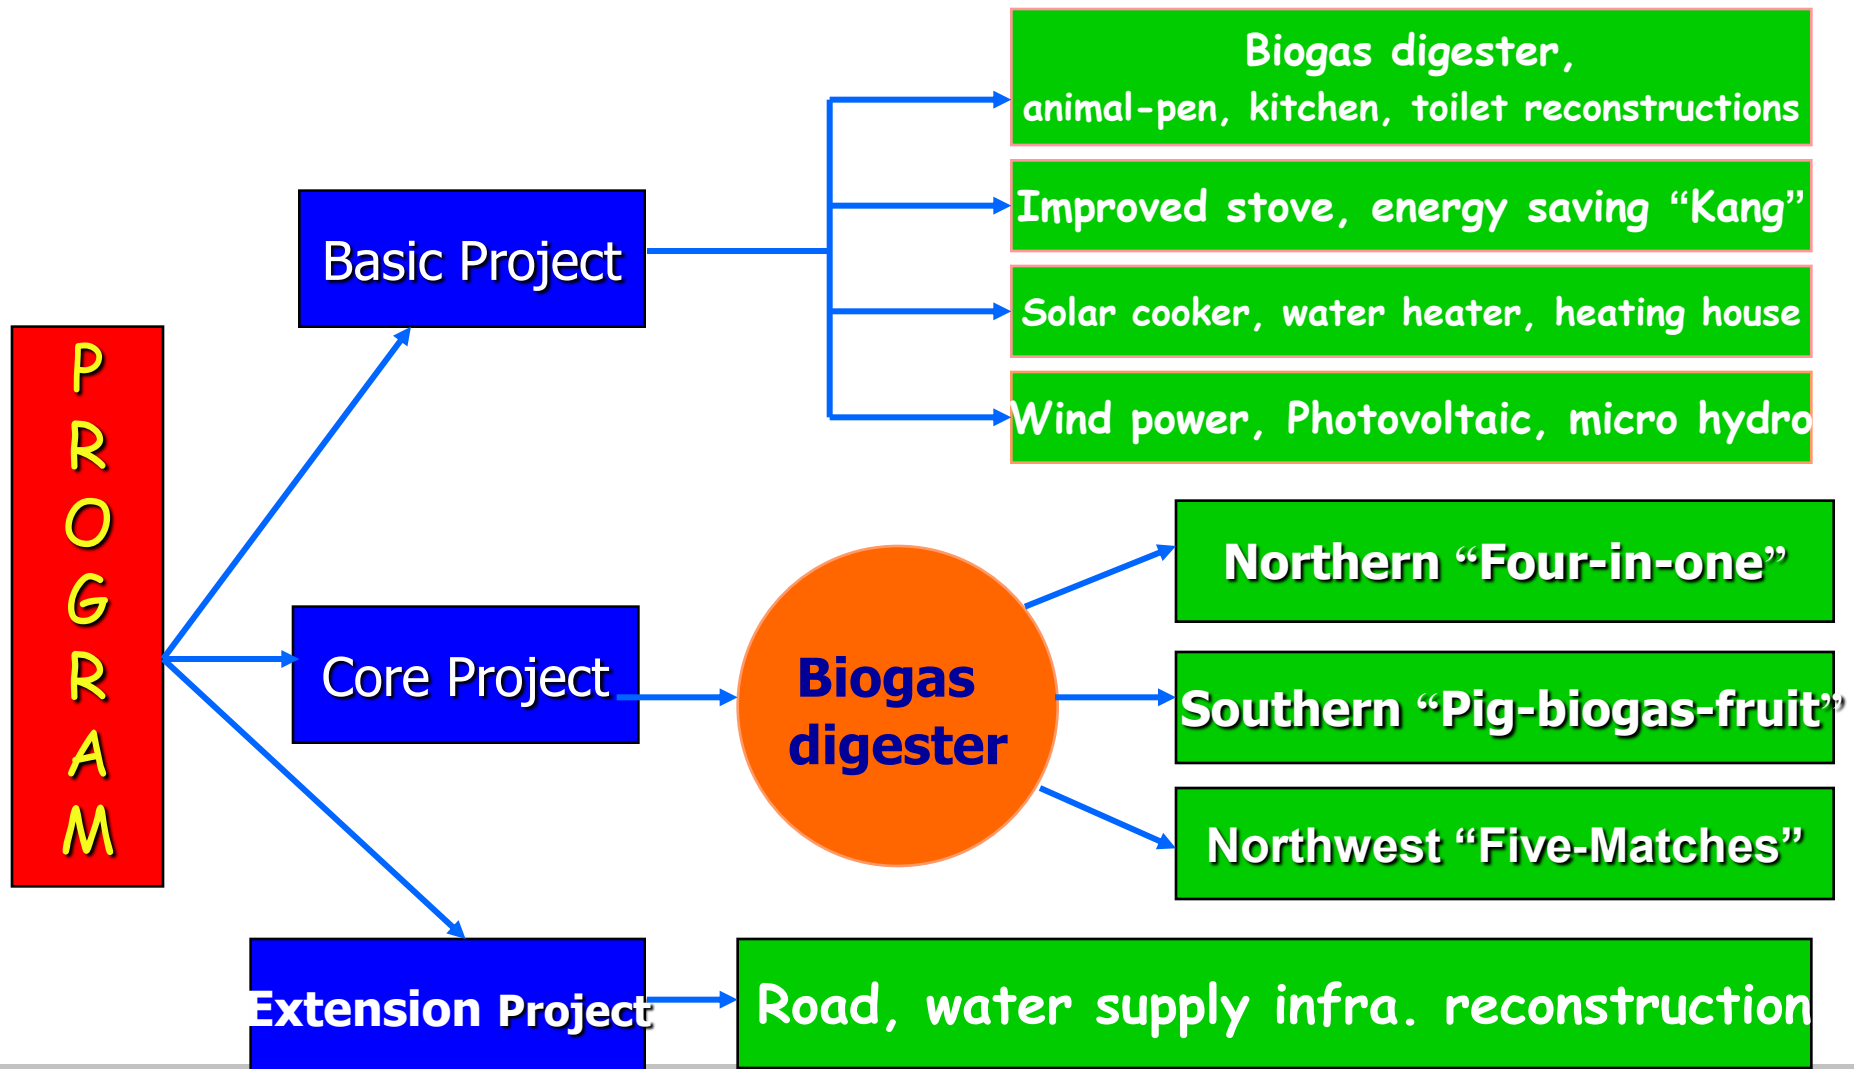

All organic materials can ferment or be digested:

faeces from cattle, pigs and possibly from poultry and humans, organic waste, energy crops, and organically loaded wastewater.

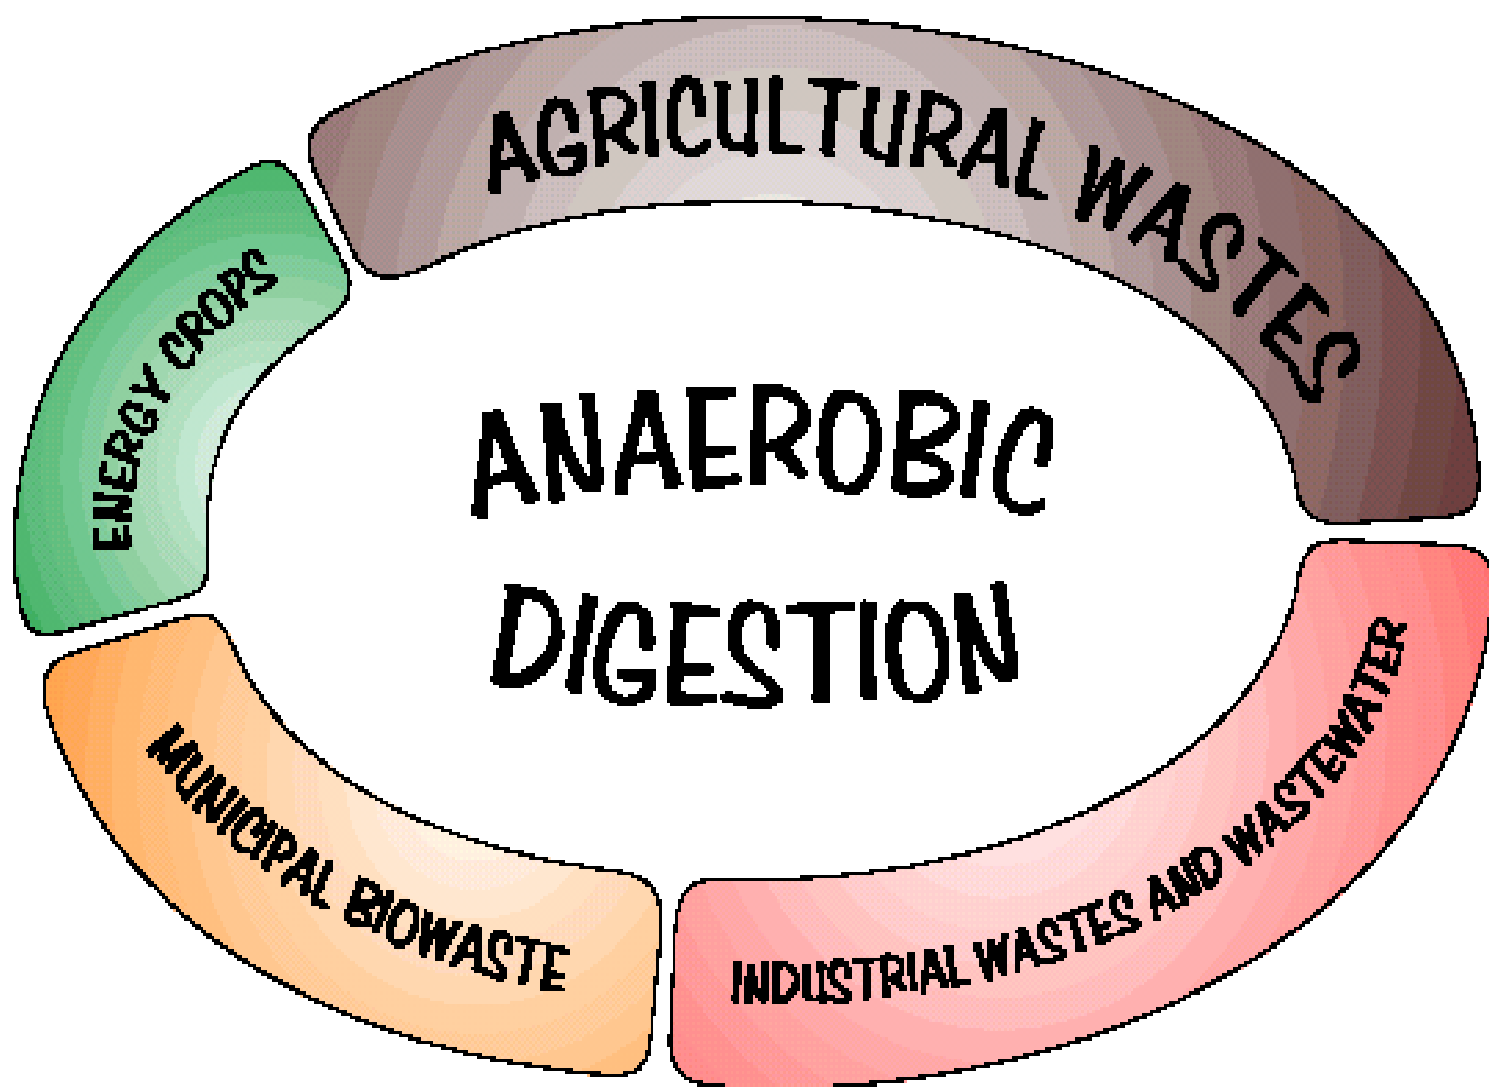

Diets higher in protein and lower in fibre, resulting in higher biogas production values!!!

Biogas potential



If the daily amount of available dung (fresh weight) is known, gas production per day will approximately correspond to the following average values:

- 1 kg cattle dung 40 litre biogas
- 1 kg buffalo dung 30 litre biogas
- 1 kg pig dung 60 litre biogas
- 1 kg chicken droppings 70 litre biogas
- 1 kg human excrements 60 litres biogas



The maximum of biogas production from a given amount of raw material depends on the type of substrate. As more biogas per unit produced, as better the BOD reduction.

If the live weight of all animals whose dung is put into the biogas plant is known, the daily gas production will correspond approximately to the following values:

- cattle, buffalo and chicken: 1,5 litres biogas per day per 1 kg live weight




Amount cooked	Time (min)	Gas (L)
1 L water	10	40
5 L water	35	165
500 g rice	30	140
1000 g rice	37	175
350 g pulses	60	270
700 g pulses	70	315

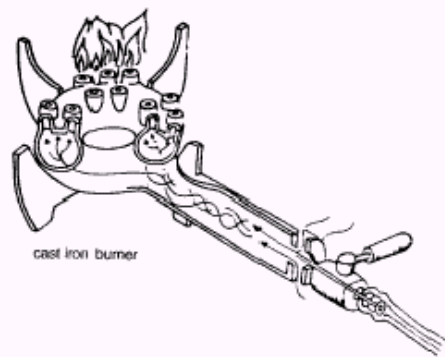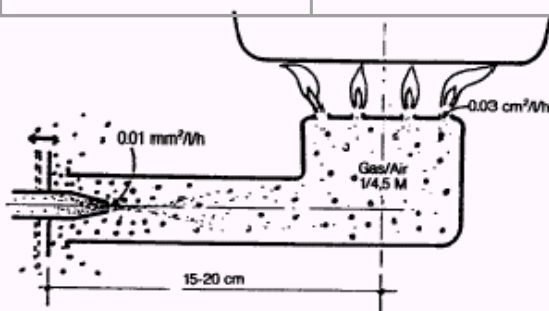

Equipment	Amount of biogas
Household burners	200 – 450 L/h
Industrial burners	1000 – 3000 L/h
Refrigerator 100 L depending on outside temperature	30 – 75 L/h
Gas lamp, equiv. to 60 W bulb	120 – 150 L/h
Biogas/biodiesel engine per bhp	420 L/h
Generation 1kwh electricity biogas/biodiesel or gas engines	500-700 L/h

biogas as energy

Options for biogas utilisation

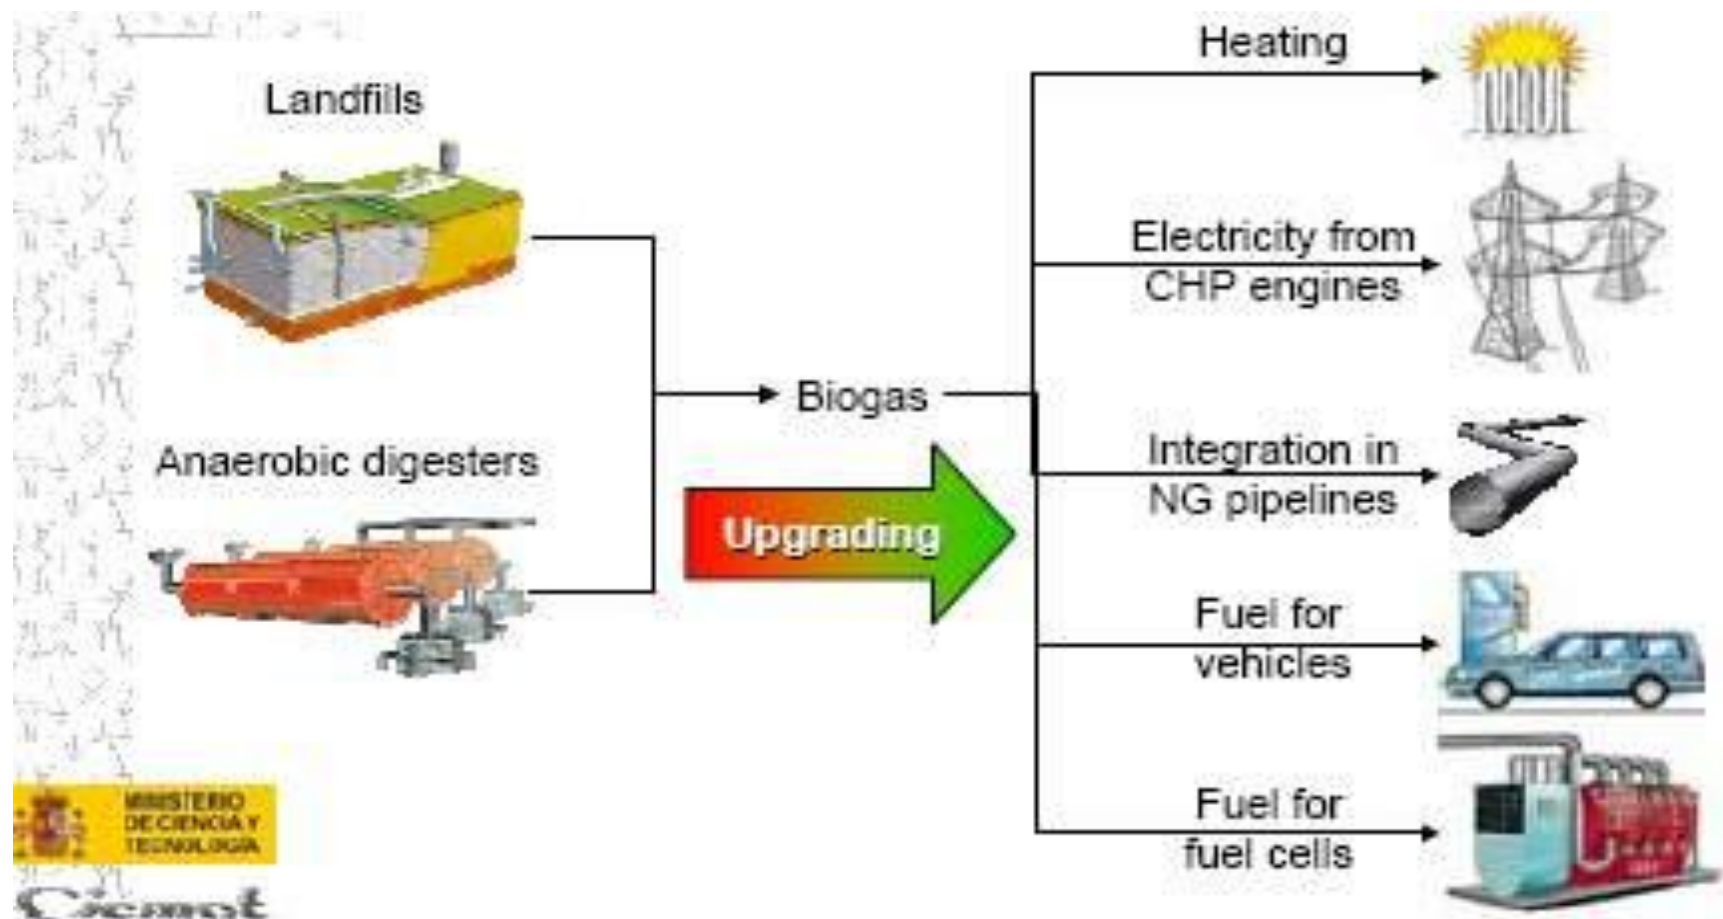

Biogas as fuel for waste incineration

- Waste incineration needs fossil fuel to burn waste in a rotating kiln; this could be partially replaced by biogas



Electricity from CHP-engines

- Gas-engine electricity generation needs medium-grade biogas purification (removal of moisture and trace gases)



Biogas feed in the natural gas grid

- Biogas needs to be high-graded with carbon-dioxide removal to natural gas standards.



Biogas as fuel for vehicles



This option
needs high-
upgraded
biogas with a
quality
compared to
LNG/CNG



Biogas sanitation

Human excreta from dry or low flush toilets and biodegradable organic fraction of household waste could enter a (on-site or off-site) anaerobic (wet or dry) digester to be treated and to produce biogas.

For biogas plant regarded from an **energy point of view**, its better to have some animal manure or additional feed of organic waste, and to optimize the retention time related to energy output ./ construction volume.

For biogas **as a sanitation option** it is more important to look for the sanitization of the incoming black-, brown-, or wastewater and organic wastes. Therefore the input material stays longer in the digester, and the retention time will be adopted with an optimum of sanitation degree and biogas production.

Retention time

Under plug flow conditions - without post-treatment in wetlands or polishing ponds - the usual treatment of faecal sludge, properly applied by

1. anaerobic psychrophilic fermentation (above 10°C and retention times of at least 100 days),
2. mesophile digestion (above 30°C with retention times of at least 50 days) or
3. thermophile digestion temperature (above 55°C and about 10 days retention time),

can be considered as sufficient.

(volume ratio: 10:5:1)

Biogas from brown water

The concentration of nitrogen in the black water could be so high, that the digestion process could be stopped. Ammonia from the urine will be transformed by enzymes in urea, carbon dioxide and ammoniac. Urea will be toxic to the bacteria (self-intoxification).

This could be solved by solid/liquid separation (AQUATRON, filter bag, settler) or urine diversion toilet bowls and pans, and the “solid” part (faeces, sludge) are digested.

III. Benefits Achievable

- a) Social benefits
- b) Economic benefits
- c) Environment and ecological

a) Social Benefits

- Job creation for local people
- Health improvement—disease reduction due to utilization of clean energy and end products use as land fertilizer
- Especially good for women
- Lifestyle improvement

Dispose of your waste water and save money doing it!

SRC upbeat about biodigester septic tank technology

In the 1970s when the Germans introduced biodigester septic tank (BST) technology - a money-saving way to solve the acute waste water disposal practices in Jamaica - it was an idea whose time had not yet come.

Three decades later, the state-run Scientific Research Council (SRC) is getting ready to embark on an aggressive promotion of its biodigester septic tank system, hoping to cash in on the many spin-off benefits.

SRC executive director, Dr Audia Barnett, is enthusiastic about the technology: "You are treating your waste water. You are getting gas, which you can use for cooking. You are getting water you can use for irrigation and you are getting literally no waste," she told the Sunday Observer.



"There's practically no (need for) maintenance. It's a system that my staff likes to call 'set it and forget it'. It's not like the septic tank that you have to be pumping every now and again," Barnett said.

The SRC is reporting that there has been renewed interest in BSTs, as they are called. "We have seen a resurgence... of interest in our BSTs, both at the residential level and at the industrial level," said Barnett.

Energy Equivalent of Biowaste



有机垃圾所含能量



10 kg Kitchen waste

10公斤的厨余垃圾

1 m³ Biogas = 0.75 m³ Natural gas

1 m³ 的有机气体 = 0.75 m³ 天然气

1 l Gasoline, 1 升汽油

20 km Car mileage

可供一辆轿车行驶20 km



1 kg Biowaste = 2 km car mileage

1 kg 的有机废物 = 可供一辆轿车行驶2 km

Energy Content of Biogas 沼气的内能

In China the rural families can cover their energy demand by 60 % from Biogas produced from their own BW
中国农村家庭所需能量的60%可由自己家庭日常生活垃圾经处理产生的甲烷提供

One family (3 persons) produces about 4 kg Biowaste a week = Energy equivalent to 8 km car mileages

一个三口之家每星期产生4kg有机垃圾，其所含能量可供一辆轿车行使8km

The overall biogas production potential from 75 mill.t of Chinese BMW is equivalent to 4.5 billion m³ natural gas

Biofuels and conversion

	% dry matter	Gas prod.	Combust.
Manure	7 - 12	+ + +	-
Black (brown) water	0.5 - 2	+	- - -
Sludge	25 - 50	+ +	+ / -
Slaughter waste	40 - 60	+ + + +	+ + / - -
Wet organic waste	20 - 50	+ / -	+ / -

**Energy in brown water per person per year
75 – 200 kWh net, biogas energy output**


**Diets higher in protein and lower in fibre,
resulting in higher biogas production values!!!**

Anaerobic sanitization

(BRTC, China 1985)


Pathogens & parasitic ova	Thermophilic fermentation (53-55 degrees C)		Mesophilic fermentation (35-37 degrees C)		Ambient temp. fermentation (8-25 degrees C)	
	days	Fatality (100%)	days	Fatality (100%)	days	Fatality (100%)
<i>Salmonella</i>	1~2	100	7	100	44	100
<i>Shigella</i>	1	100	5	100	30	100
<i>Polioviruses</i>			9	100		
Colititre	2	$10^{-1} \sim 10^{-2}$	21	10^{-4}	40~60	$10^{-4} \sim 10^{-5}$
<i>Schistosoma ova</i>	Several hours	100	7	100	7~22	100
<i>Hookworm ova</i>	1	100	10	100	30	90
<i>Ascaris ova</i>	2	100	36	98.8	100	53

Reduction of pathogens

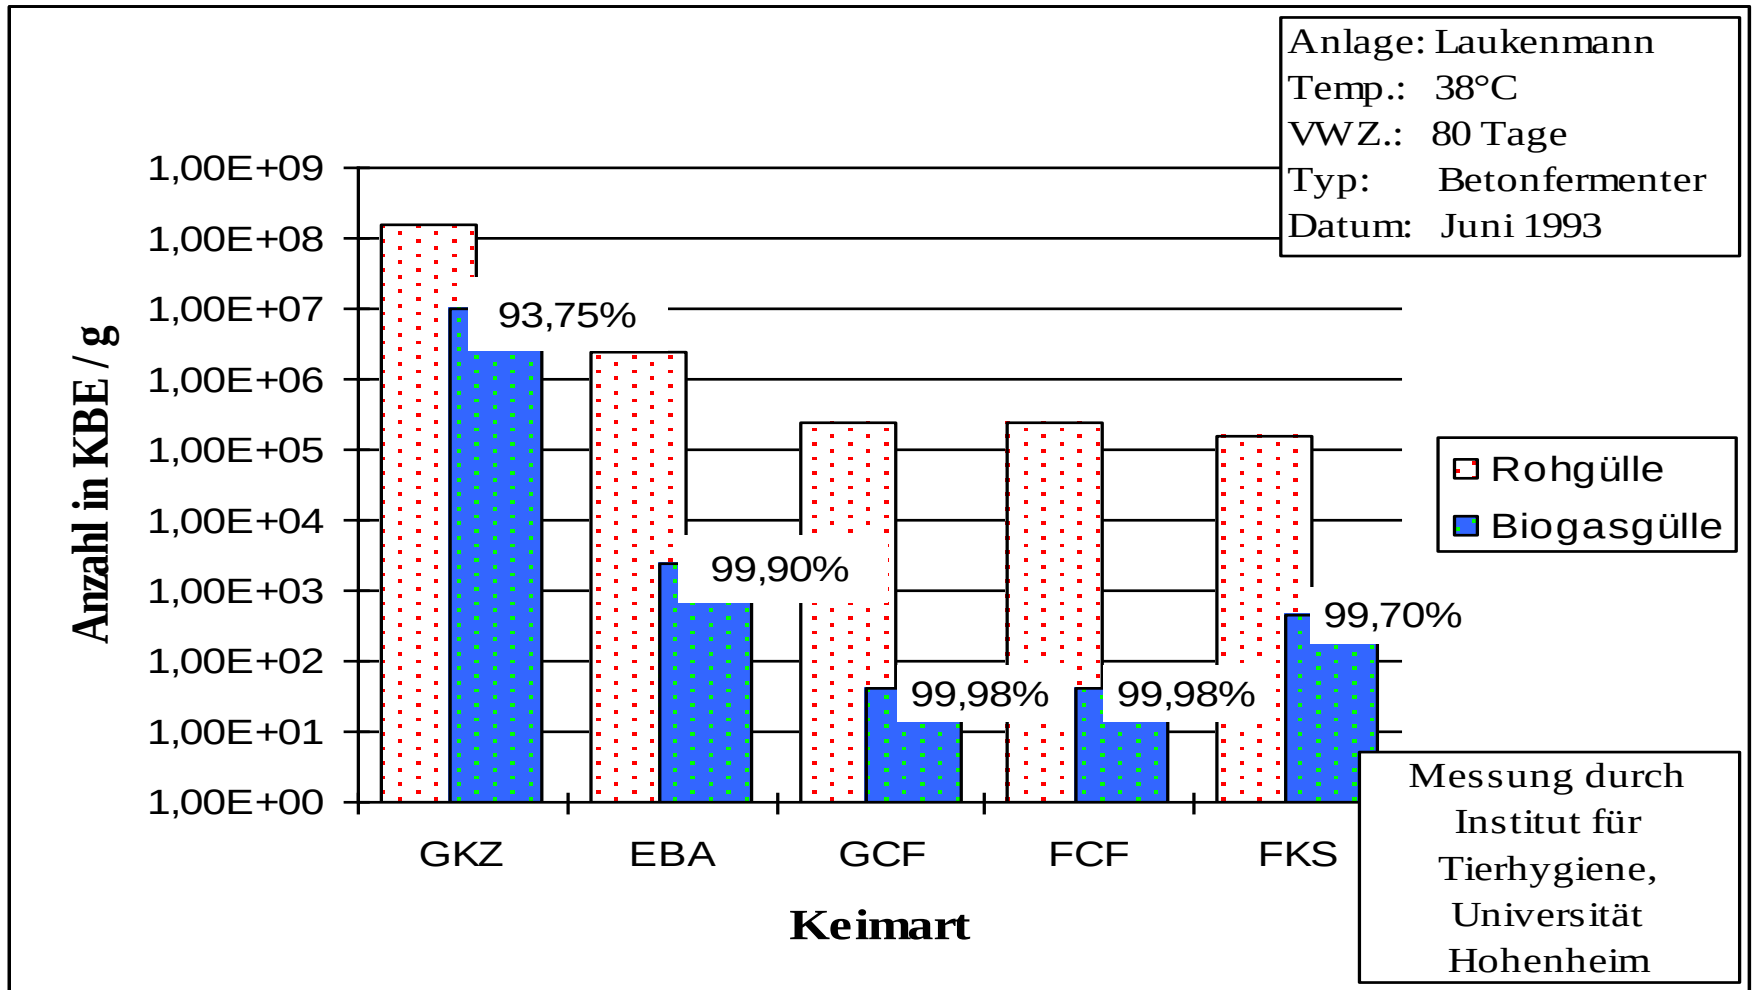

Smell reduction through digestion

Geruchsminderung in Abhängigkeit von der Verweilzeit

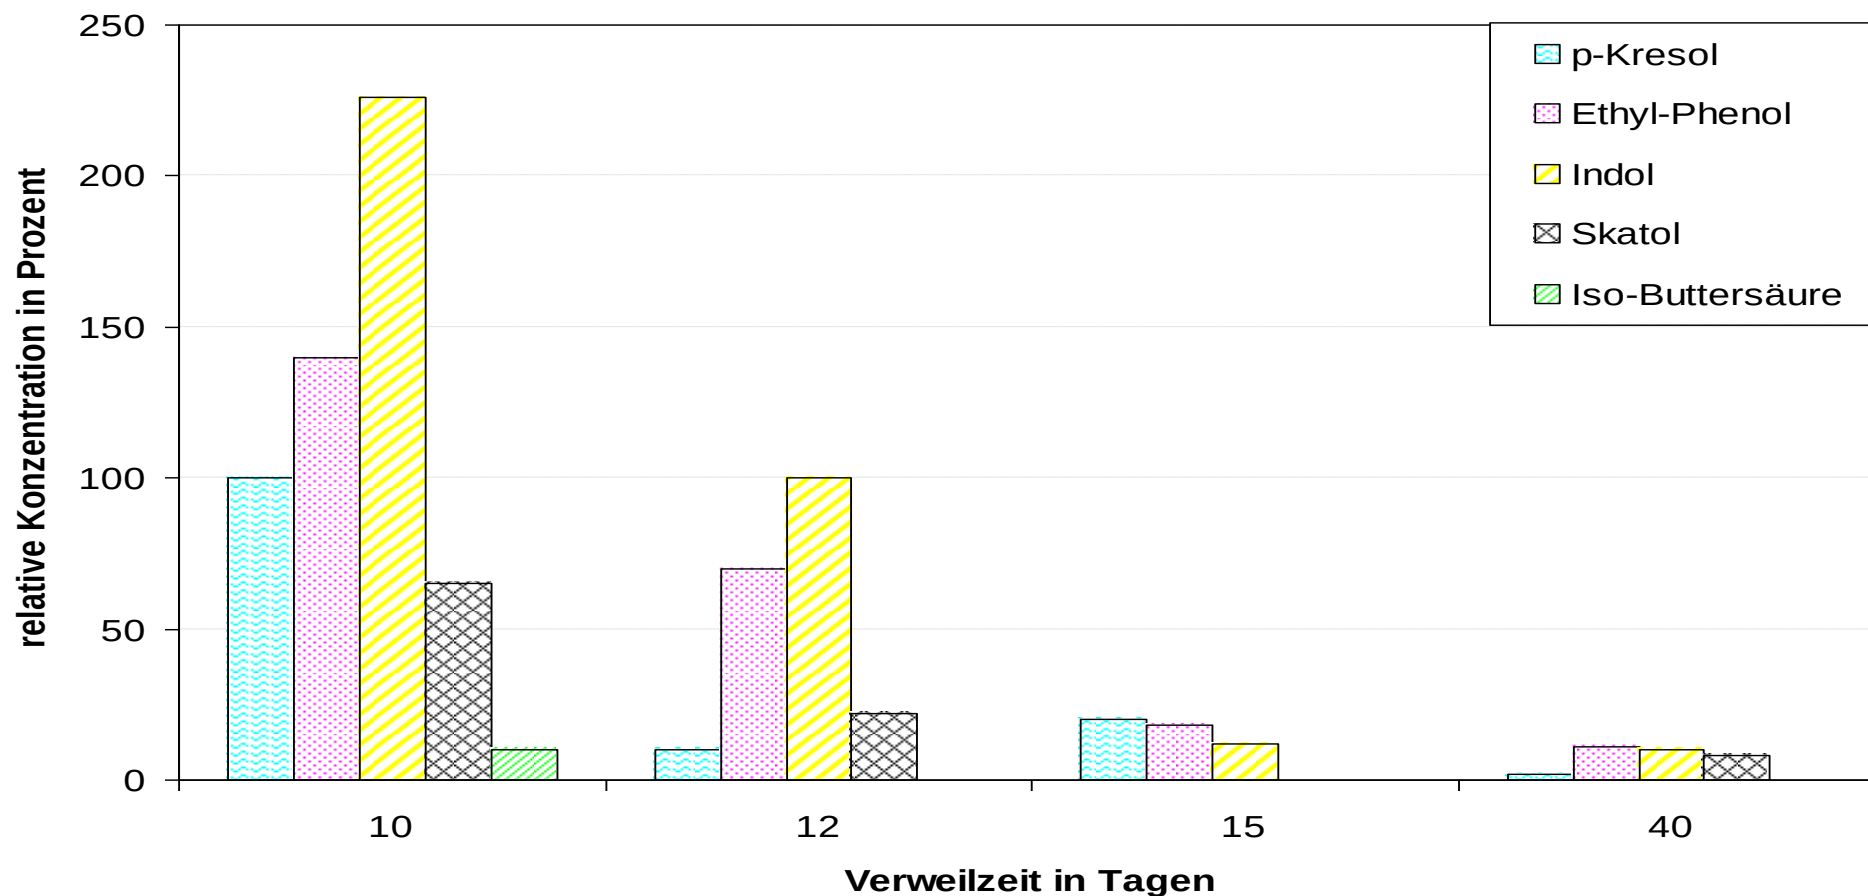


b) Economic Benefits

- Energy saving
- Farm development
- Various use of end product

b) Economic benefits---income increase

Model	Pure benefit yearly (unit: yuan)
Household biogas	600
Northern “four-in-one”	3000
Southern “pig-biogas-fruit”	2000

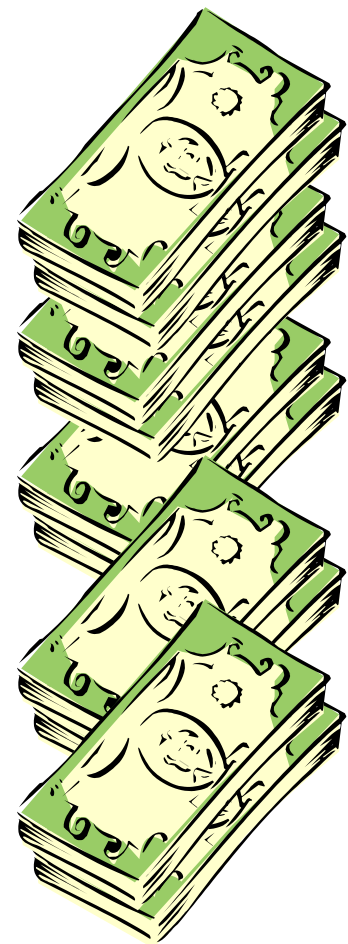

Crops, trees, shrubs



Feed

Livestock



Family



Excreta

Biogas



Manure

Biodigester

Irrigation

Pond



Effluent

The ecological farm

AGRO CHIMICA SUD
CENTRO RICERCHE AMBIENTE INDUSTRIA AGRICOLTURA



2002 9 4

沼气储粮
grain stored by biogas



沼液种菇
mushroom planted with digested sludge



沼液养鱼
fishes fed with digested slurry




水果保鲜
fruits stored by biogas



沼液浸种
seeds soaked with digested slurry



沼液喂猪
pigs fed with digested slurry

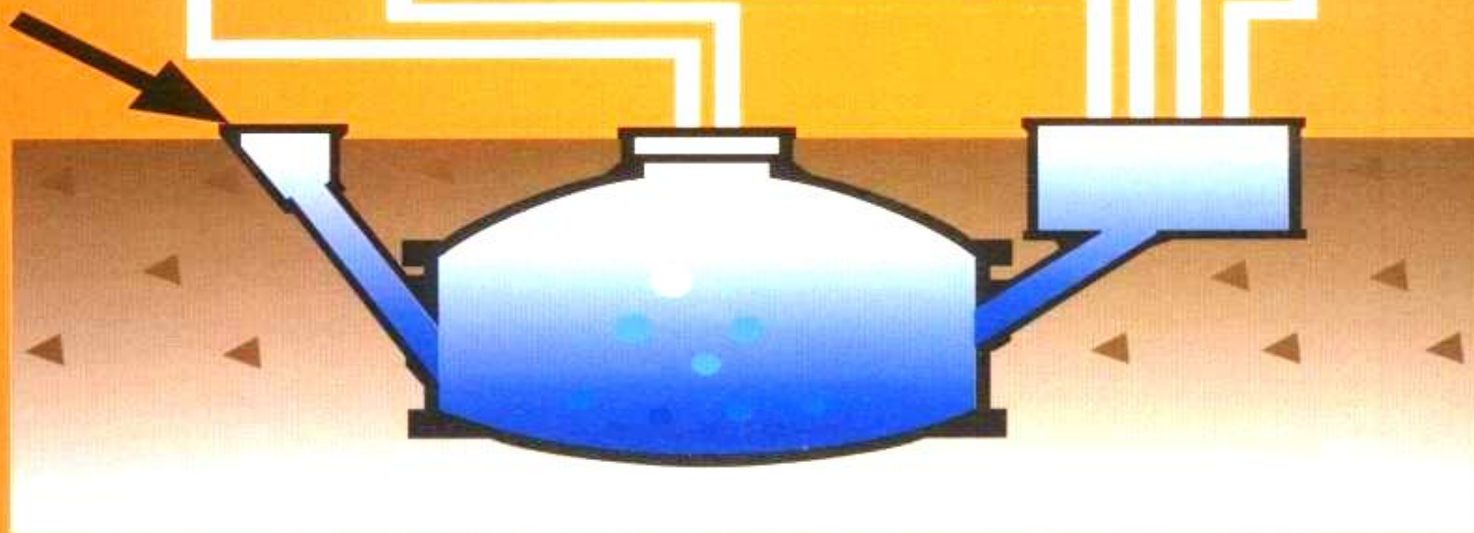



c) Environmental and ecological— protect forest



One biogas digester

8 m³

www.adv-travel.com.cn

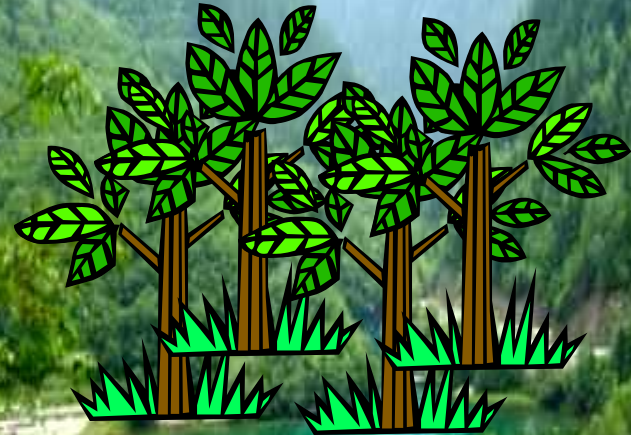

3.5mu forest

22 9:21 AM

Fossil energy substitution


The use of biomass as a substitute for fossil fuel represents a high potential for the avoidance of GHG emissions.

One opportunity is associated with the processing of faeces or brown water, by which means biogas is obtained. The latter produces energy and at the same time reduces tradable

1) The Clean Development Mechanism (CDM) is a compensation mechanism. It allows industrial countries to obtain emission reduction credits with emission reduction projects in developing countries. The credits are called Certified Emission Reductions (CER). An Annex I country invests in a Non-Annex I Country and cooperates with private or public institutions. The accounting of such reduction credits starts retroactively from the year 2000 onward

Environmental benefits---CO₂ and CH₄ reduction

81.93%

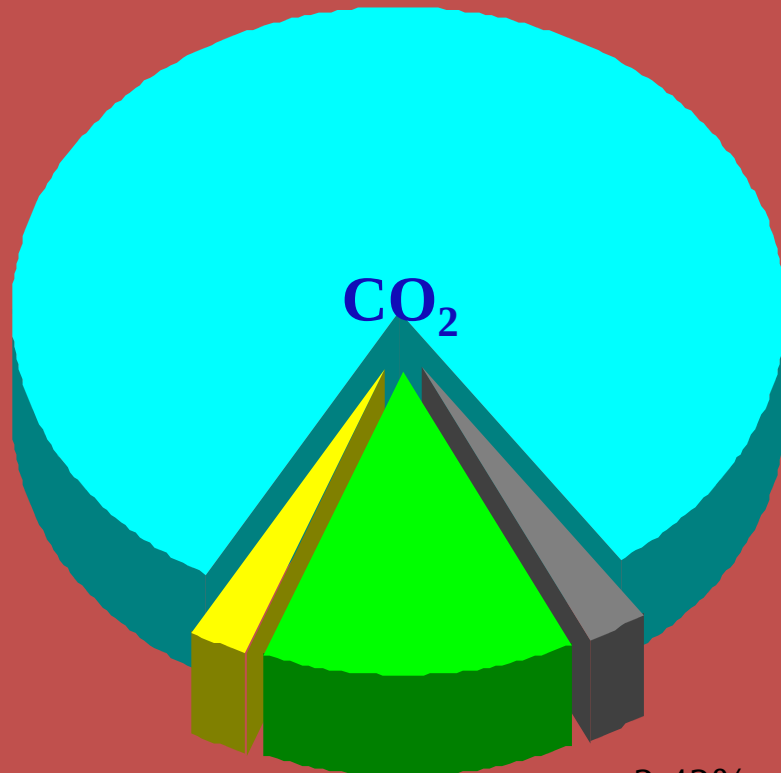

2.43%

13.22%

2.42%


improved stove

energy-saving kang

household biogas

other

63.8%

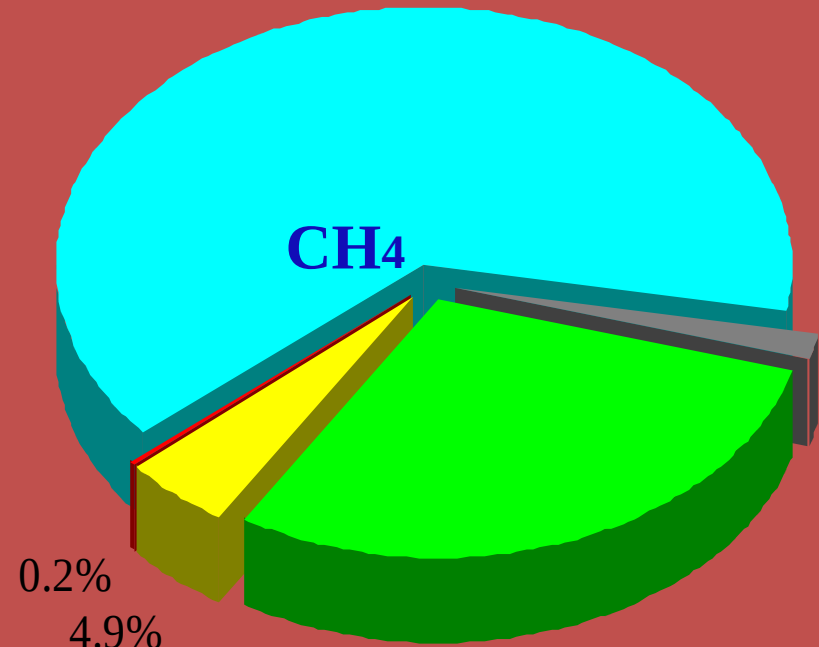

0.2%

4.9%

29.3%

省柴灶

户用沼气

其它


节能炕



大中型沼气工程


No GHG mitigation by composting!

- 1. Composting of faeces and biowaste is ambivalent. Composting (aerobic storage) of faeces can reduce CH₄ emissions but will increase N₂O by a factor of 10. In CO₂ equivalents there is no change.**
 - 2. Composting is not recommended as a Climate Emission Gas mitigation option (Bates 2001)¹.**
 - 3. Controlled anaerobic digestion of faeces, manure and biowaste combined with biogas production is a most promising option for GHG mitigation (Jarvis & Pain 1994)².**
- 1) Bates J (2001): Economic Evaluation of Emission Reductions of Nitrous Oxides and Methane in Agriculture in the EU. Contribution to a Study for DG Environment, European Commission by Ecosys Energy and Environment, AEA Technology Environment and National Technical University of Athens.
 - 2) Jarvis SC and Pain BF (1994): Gaseous emissions from an intensive dairy farming system. Proceedings of the IPCC AFOS Workshop. 55-59. Canberra, Australia.

Biogas for overall household sanitation

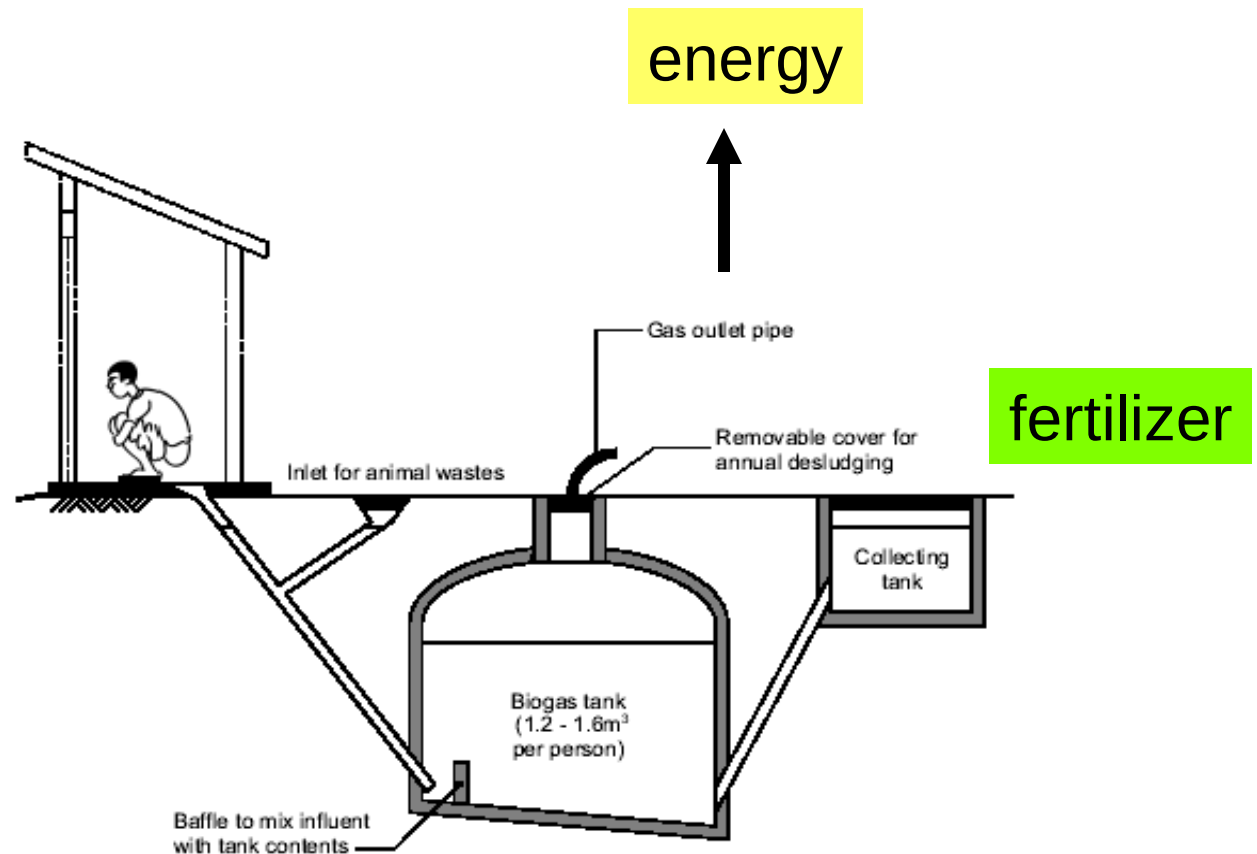

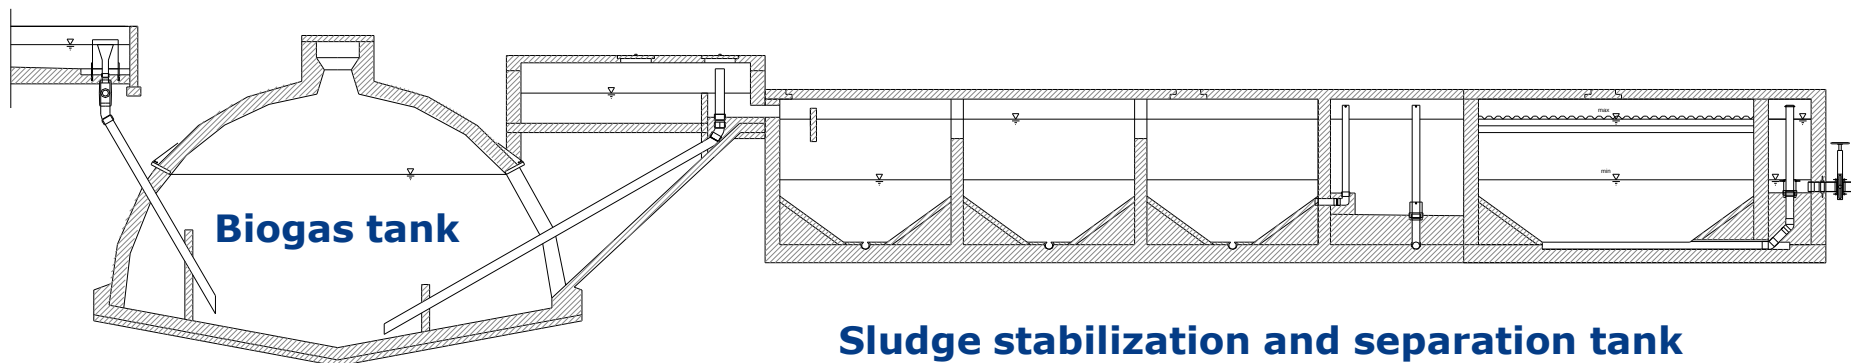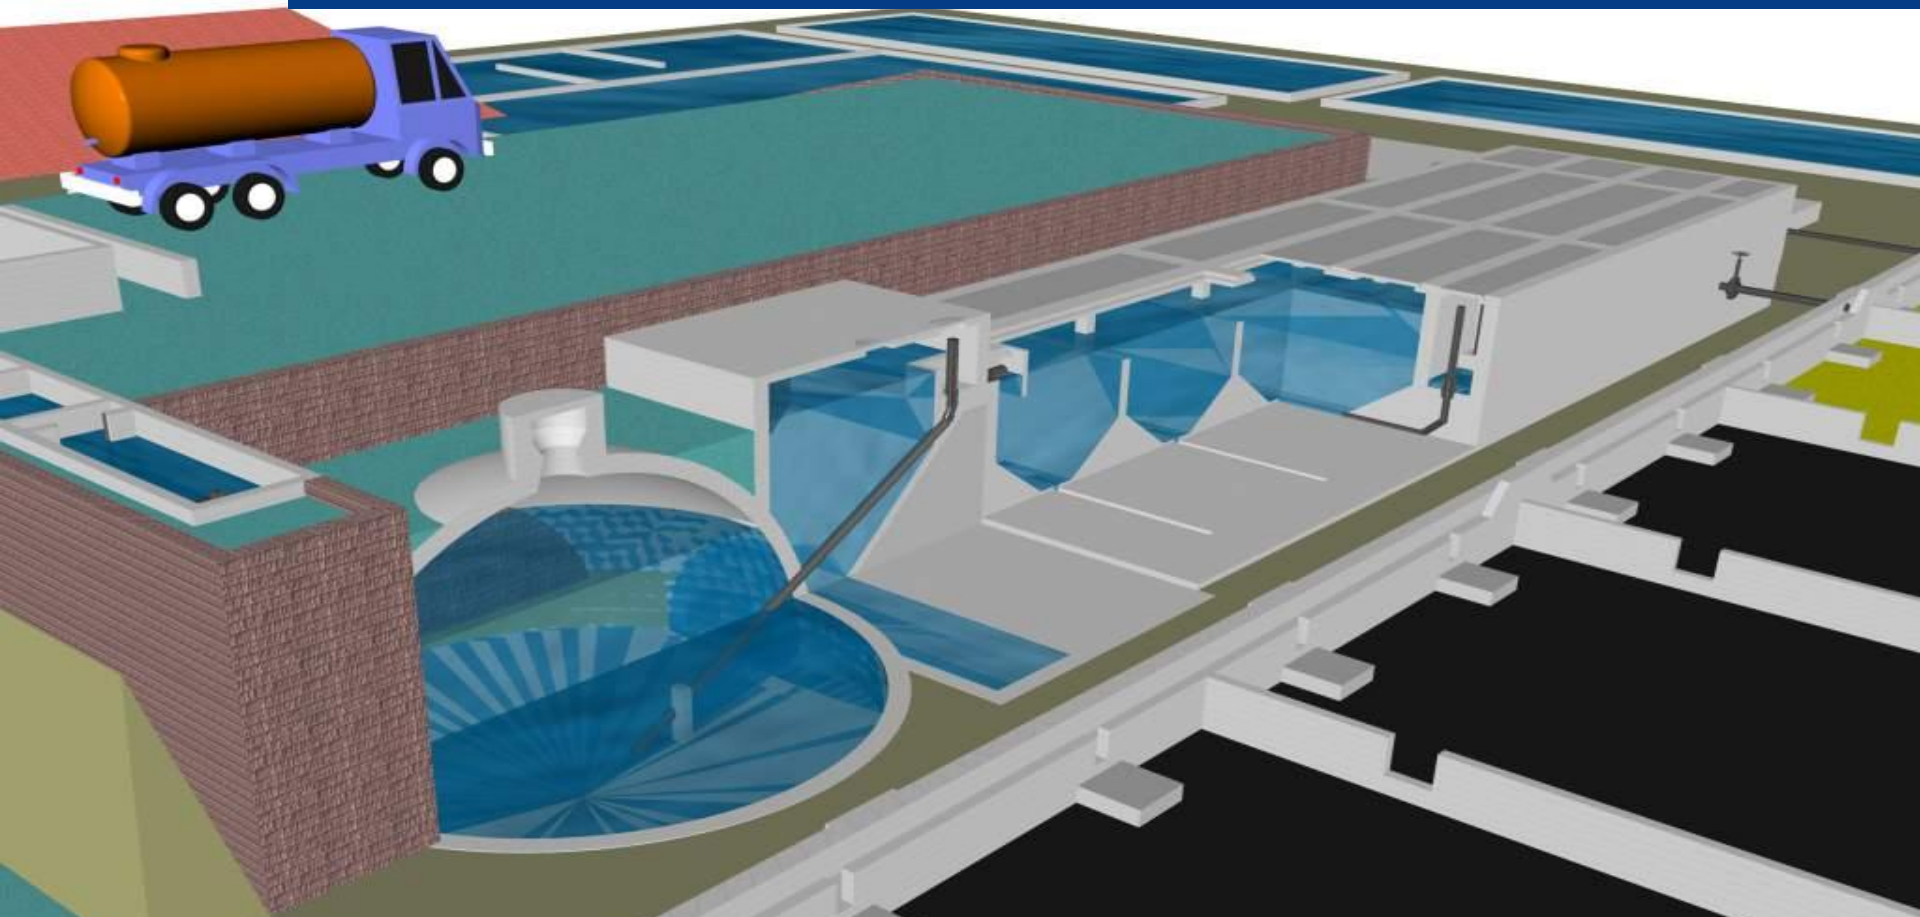

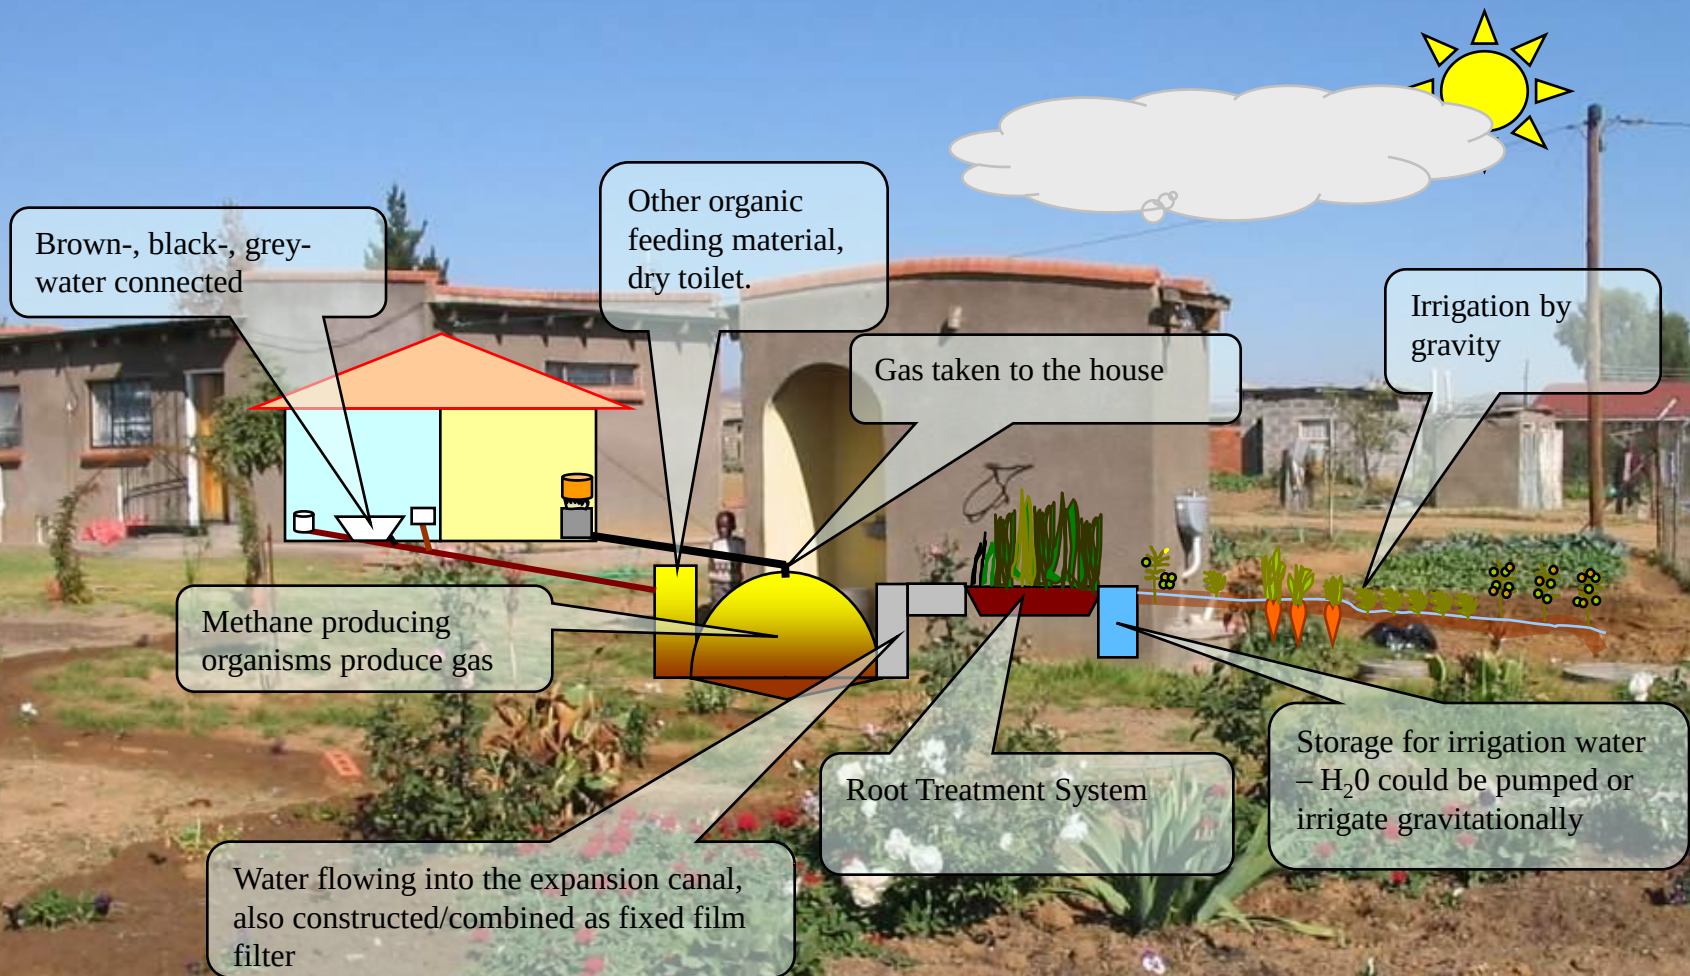

Sketch of biodigester replacing a septic tank. Wastewater as well as kitchen and garden waste enter the digester and are broken down to biogas and fertile water.

The advantages: No more emptying of septic tank. Reuse of all water in the garden. Less cost on cooking energy.

**Running cost (-) or benefits (+) in Maluti per year
(4 person household)**

- Conventional septic tank - 600
- Biodigester septic tank +400
- Cheap pit latrine - 50
- Sophisticated double vault VIP latrines - 100
- Ecosan toilet with urine separation,
utilizing compost and urine +200
- Minimum urine separation set up,
utilizing urine only + 30

Website: www.agrochimicasud.com

phD. Salvatore Montanino
alkemia@tin.it